


FP Series

Hydraulic frame press

A frame clamp for gluing rectangular frames with three vertical beams and the lateral beam with two cylinders. The design of vertical beams enables to get closer to one another and allows gluing of very small frames. The frame press is electrically operated. The vertical beams are completed with locking pins, counterweight on chain for easier handling with pistons.

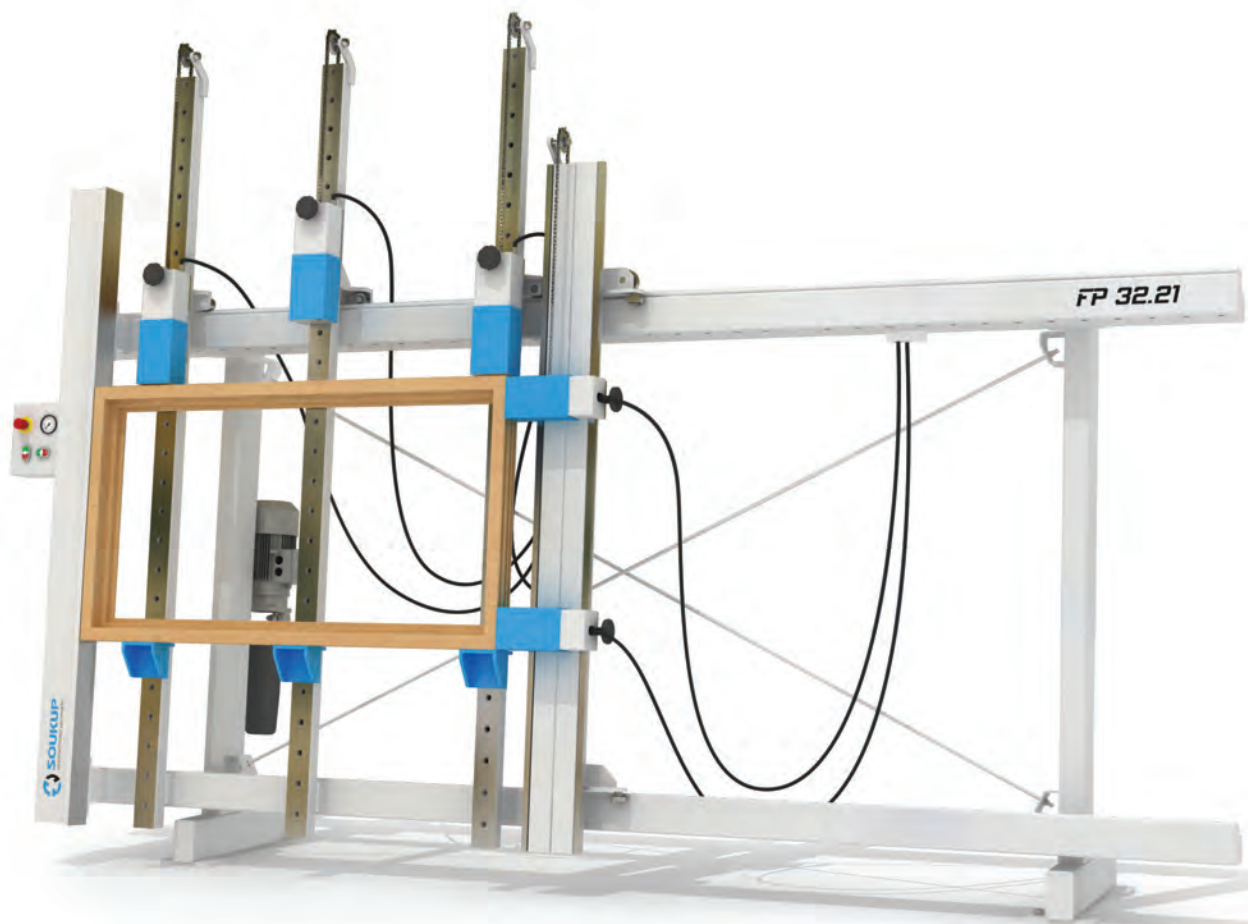

FP 25.18 (2500 x 1800 mm)

FP 32.21 (3200 x 2100 mm)

FP 40.26 (4000 x 2600 mm)

- hydraulic cylinders (2000 kg, 150 mm stroke)
- 3 vertical beams with 1 piston, with self-locking pins, counterweight on chain
- 1 lateral clamping unit with 2 pistons, counterweight on chain
- electric operated central pump